


Bell Anti Vibration Mounts FRH

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

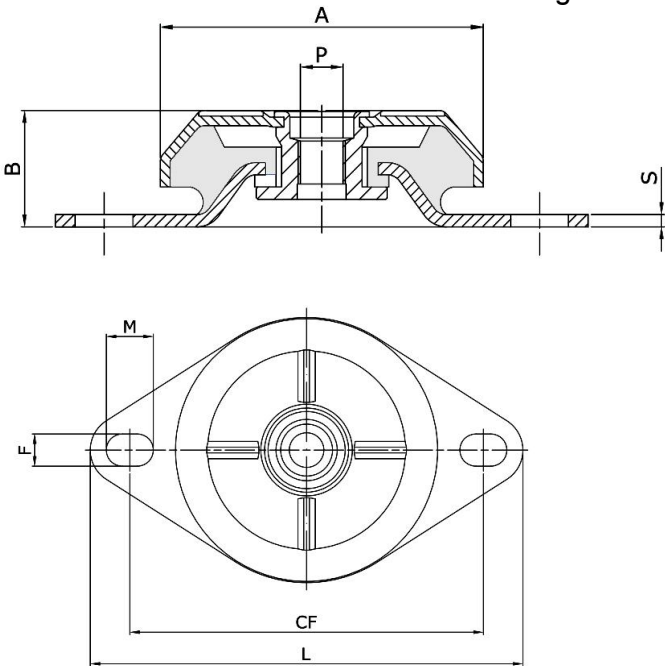

Part No	Hardness (IRHD)	A	B	P		F x M	CF	L	S	Average Stiffness (daN/mm)	M ax Load (daN)	M ax Deflec. (mm)
FRH6230W	40	62	30	M8	M10	9*14	89	110	2.5	70	140	2.0
FRH6230M	60									120	240	2.0
FRH7830W	40	78	30	M10	M12	9*12	110	135	2.5	47	108	2.3
FRH7830M	60									116	267	2.3
FRH8330W	40	83	30	M10	M12	11.5*15	110	135	3	65	130	2.0
FRH8330M	60									98	196	2.0
FRH9235W	40	92	35	M12	M16	10*15	123.5	150	3	70	175	3.5
FRH9235M	60									110	380	3.5
FRH10638W	40	106	38	M14	M16	14*18	143	175	4	78	525	3.6
FRH10638M	60									150	480	3.6
FRH12543W	40	125	42	M16	M18	14.5*20	156	192	4	88	382	4.0
FRH12543M	60									185	780	4.0
FRH15050W	40	150	50	M16	M20	14*18	182	218	4	120	840	6.0
FRH15050M	60									200	1540	6.0