


Bell Anti Vibration Mounts FRHQ

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

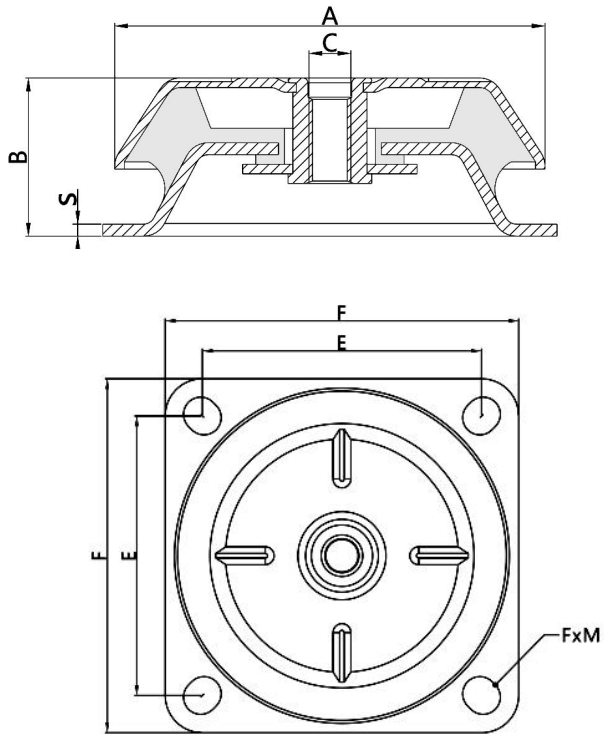

Part No	Hardness (IRHD)	A	B	C	F x M	CF	L	S	Average Stiffness (daN/mm)	Max Load (daN)	Max Dedflec. (mm)
FRHQ15020W	40	150	20	M20	14.5*17	132	170	4	120	840	7.0
FRHQ15050M	60								220	1540	7.0
FRHQ18066W	40	180	66	M20	18.5*21	150	190	5	160	1120	7.0
FRHQ18066M	60								320	2240	7.0