


Bell Anti Vibration Mounts FRS

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

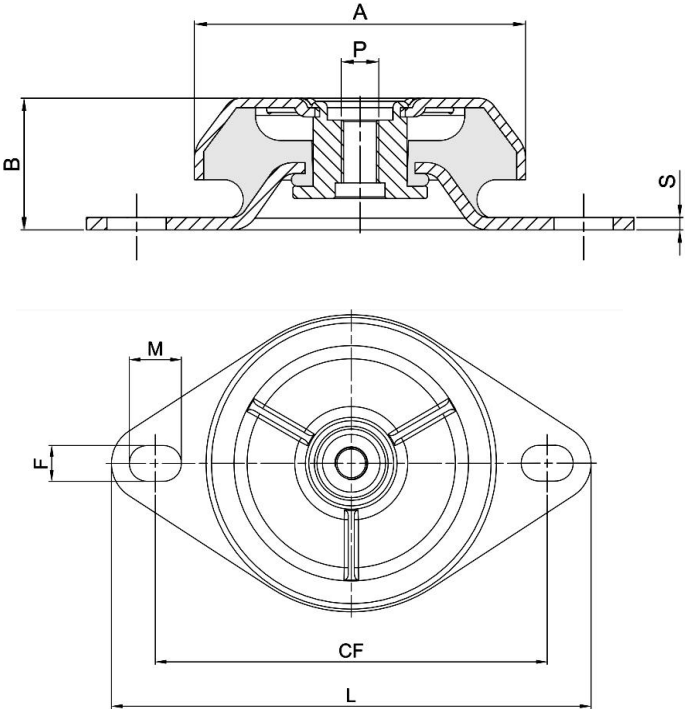

Part No	Hardness (IRHD)	A	B	P			F x M	CF	L	S	Average Stiffness (daN/mm)	M ax Load (daN)	M ax Dedflec. (mm)
FRS6035W	40	63	35	M8	M10	M12	9*14	89	110	2.5	7.0	30.0	4.3
FRS6035M	60										15.8	60.0	3.8
FRS6235W	40	63	35	M8	M10	M12	11*15	100	120	2.5	7.0	30	4.3
FRS6235M	60										15.8	60	3.8
FRS6335W	40	63	35	M8	M10	M12	9*14	100	120	2.5	50	215	4.3
FRS6335M	60										90	342	3.8
FRS8335W	40	83	35	M10	M12		11.5*15	110	135	3	17.8	80	4.5
FRS8335M	60										44.5	180	4.0
FRS10642W	40	106	42	M12	M16		13*19	143	175	4	33.5	200	5.9
FRS10642M	60										60.7	400	5.9
FRS15054W	40	150	54	M16	M20		14*18	182	218	4	37.5	450	6.5
FRS15054M	60										78.7	800	6.5