
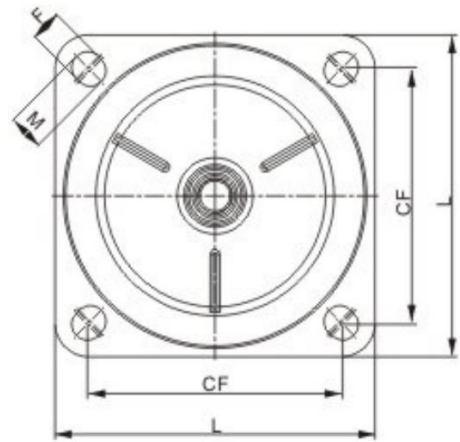


Bell Anti Vibration Mounts FRSQ

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

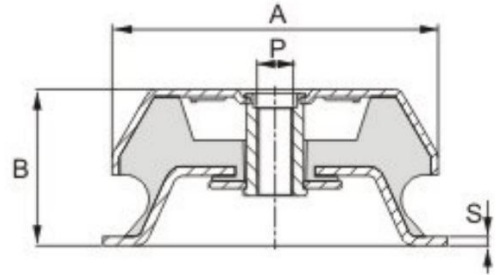

Part No	Hardness (IRHD)	A	B	P		F x M	CF	L	S	Average Stiffness (daN/mm)	Max Load (daN)	Max Dedflec. (mm)
FRSQ15054W	40	150	54	M16	M20	14.5*17	132	170	4	37.5	450	6.5
FRSQ15054M	60									78.7	800	6.5
FRSQ18066W	40	180	66	M16	M20	14.5*18	146	190	5	58.2	900	10
FRSQ18066M	60									127	1700	10
FRSQ220105W	40	220	105	M24		17.5*20	180	220	5	95	1700	17
FRSQ220105M	60									195	3400	17