


Cone Mounts of Engine

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

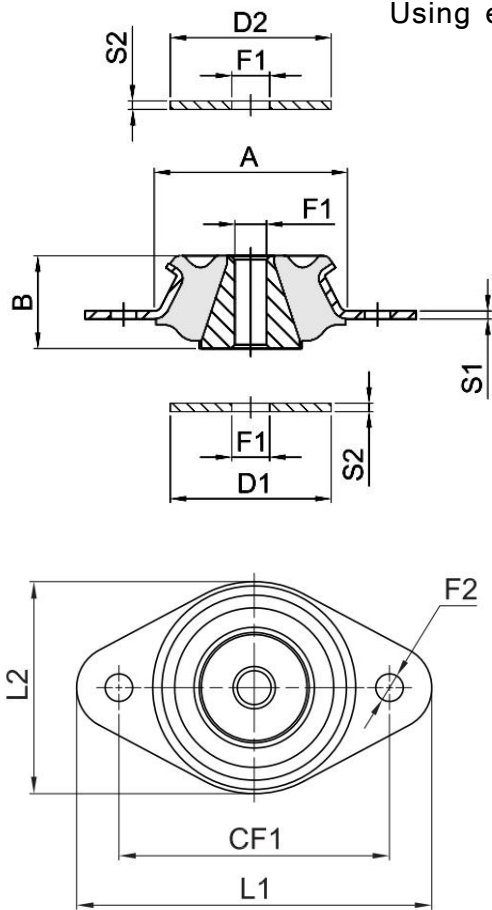

Part No	Hardness (IRHD)	A	B	CF1	L1	L2	F1	S1	F2	D1	D2	F1	S2	Average Stiffness (daN/mm)	M ax Load (daN)	M ax Dedflec. (mm)
4623CN08W	45	46	23.5	64	84	50	8	2	6.5	40	8	40	2	12.5	37.5	3
4623CN08M	60													22	66	
4623CN08H	70													36	108	
4830CN12W	45	48	30.2	73	89	21	12	2	8.7	49	34	12	2	9	36	4
4830CN12M	60													15	60	
4830CN12H	70													21	84	
6051CN12W	45	60	45	80	107	68	12.1	2.5	11	55	50	12.2	3.5	20	100	5
6051CN12M	60													34	170	
6051CN12H	70													50	250	