


Rubber Engine mount EH

Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero

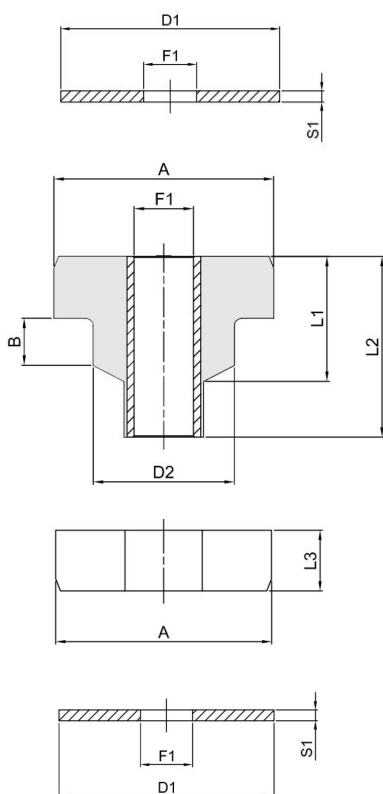

Part No	Hardness (IRHD)	A	B	F1	D2	L1	L2	L3	Average Stiffness (daN/mm)	Max Load (daN)	Max Dedflec. (mm)
EH30W	45	30	5.5	8.2	18	16	26.5	10	28	42	1.5
EH30M	60								50	75	1.5
EH40W	45	40	19	8.5	16	21.5	33.5	12	35	63	1.8
EH40M	60								70	105	1.5
EH50W	45	50	10	12	32	30	50	20	43	80	1.9
EH50M	60								86	130	1.5
EH65W	45	65	16	16.5	40	42	61.7	23	58	120	2.1
EH65M	60								140	260	1.9
EH90W	46	89	19	24	57	50.5	73	25	130	260	2.0
EH90M	60								240	450	1.9