



Flanged Circular Mounts VBL


Rubber material: NR Rubber

Metal material: Zinc-plated steel UN-ISO 2081

Using environment: 40-80°C below zero



Part No	Hardness (IRHD)	A	B	L	P	F F x M F1 x M1	CF1	CF2	L1	L2	S	Average Stiffness (daN/mm)	M ax Load (daN)	M ax Dedflec. (mm)
VBL7050K	50	71	50	37	M12	12	100		127	76	3	65	325	5.0
VBL7050M	60											82.6	413	
VBL7050H	70						110					103	151	
VBL10580K	50	100	80	38	M20	14*17.5	138	144.5	174	108	4	50	600	12
VBL10580M	60											90	1080	
VBL10580H	70											145	1740	
VBL12564K	50	124	64	42	M20	18*23	177	182	215	144	4	85	850	10
VBL12564M	60											140	1400	
VBL12564H	70											220	2200	

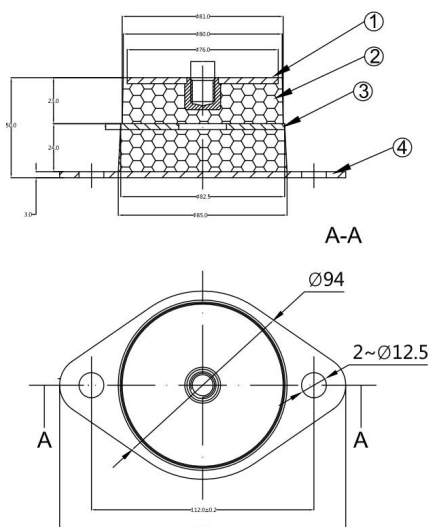

60°

Part No	Hardness (IRHD)	A	B	P	F F x M F1 x M1	CF1	CF2	L1	L2	S	Average Stiffness (daN/mm)	M ax Load (daN)	M ax Dedflec. (mm)
VBL8550K	50	88	48	M12	11	112		144	94	3	55	440	8
VBL8550M	60										90	720	
VBL8550H	70										130	1040	

ZhengBai Technology Co.Ltd

Address: No.3,Yihe Street Alley 2, Jidong er,Xiaolan Town, Zhongshan City, Guangdong, China.

Tel: +8613528101237

WhatsApp: +8613528101237

www.zhengbaitech.com

Info@zhengbaitech.com