


Anti Vibration Mounts PDR

Rubber material: NR Rubber

Using environment: 40-80°C below zero

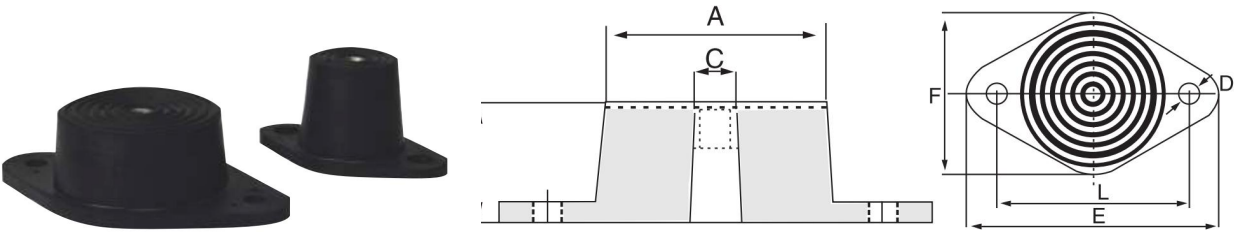

Item	A	B	C	D	E	F	L	LMaxstatic deflection (mm)	Optimalload daN		
									40RHD	60RHD	75RHD
PDR-1	30	38	M8	M8	81	41	60	4	12	25	30
PDR-2	44	48	M10	M10	98	59	76	4	30	60	80
PDR-3	60	71	M12	M10	143	86	105	6	70	120	180
PDR-5	108	60	M16	M12	212	132	165	10	400	800	1200

